


Product availability : Stock - Normally stocked in distribution facility

Price* : 195.00 USD

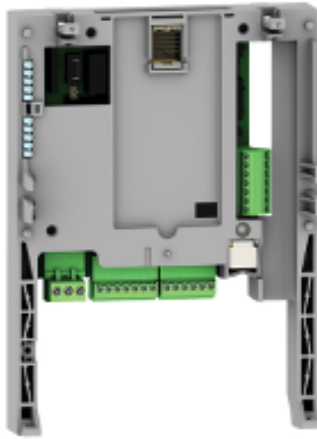

Main

Product or component type	Extended I/O card
Range compatibility	Altivar 61 Altivar 71 Altivar Lift Altivar 61Q Altivar 71Q
Supply	Internal supply for reference potentiometer, 10.5 V DC (10...11 V) , <= 0.01 A, impedance: 1...10 kOhm for overload and short-circuit protection Internal supply, 24 V DC (21...27 V) , <= 0.2 A for overload and short-circuit protection
Analogue input number	2
Analogue input type	AI3-/AI3+ differential current programmable: 0...20 mA, impedance: 250 Ohm, sampling time: 4...6 ms, resolution: 11 bits + sign AI4 software-configurable current: 0...20 mA, impedance: 250 Ohm, sampling time: 4...6 ms, resolution: 11 bits AI4 software-configurable voltage: 0...10 V DC, 24 V max, impedance: 30000 Ohm, sampling time: 4...6 ms, resolution: 11 bits
Analogue output number	2
Analogue output type	AO2 software-configurable current: 0...20 mA, impedance: 500 Ohm, sampling time: 4...6 ms, resolution: 10 bits AO3 software-configurable current: 0...20 mA, impedance: 500 Ohm, sampling time: 4...6 ms, resolution: 10 bits AO2 software-configurable voltage: +/- 10 V DC, impedance: 470 Ohm, sampling time: 4...6 ms, resolution: 10 bits AO3 software-configurable voltage: +/- 10 V DC, impedance: 470 Ohm, sampling time: 4...6 ms, resolution: 10 bits
Discrete output number	5
Discrete output type	(LO3, LO4) assignable logic, sampling time: 4...6 ms, compatible with level 1 PLC (R4A, R4B, R4C) configurable relay logic
Discrete output logic	(LO3, LO4) negative (LO3, LO4) positive
Discrete input number	6
Discrete input type	(RP) frequency control, , sampling time: 4...6 ms (LI11...LI14) programmable, , compatible with level 1 PLC, impedance: 3.5 kOhm, sampling time: 4...6 ms

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discrete input logic	(L11...L114) negative state 0 \geq 16 V state 1 \leq 10 V (L11...L114) positive state 0 \leq 5 V state 1 \geq 11 V (RP) positive state 0 < 1.2 V state 1 \geq 3.5 V
----------------------	---

Complementary

Electrical durability	100000 cycles for configurable relay logic output(s)
Discrete output voltage	24 V DC (voltage limits: \leq 30 V) assignable logic
Output current limits	0.2 A, assignable logic
Minimum switching current	Configurable relay logic 3 mA for 24 V DC
Maximum switching current	Configurable relay logic 5 A at 250 V AC on resistive load, $\cos \phi = 1$ Configurable relay logic 5 A at 30 V DC on resistive load, $\cos \phi = 1$ Configurable relay logic 1.5 A at 250 V AC on inductive load, $\cos \phi = 0.4$ and $L/R = 7$ ms Configurable relay logic 1.5 A at 30 V DC on inductive load, $\cos \phi = 0.4$ and $L/R = 7$ ms
PTC probe input	TH2+, TH2- trip resistance, impedance: 3 k Ω TH2+, TH2- reset resistance, impedance: 1.8 Ω TH2+, TH2- short circuit protection, impedance: < 0.05 Ω TH2+, TH2- for 6 PTC probe, impedance: \leq 1.5 Ω
Discrete input voltage	24 V DC (voltage limits: \leq 30 V) programmable
Discrete input frequency	0...30 kHz frequency control
Electrical connection	Terminal, 1.5 mm ² / AWG 16, 2.21 lbf.in (0.25 N.m)
Product weight	0.66 lb(US) (0.3 kg)

Ordering and shipping details

Category	22135 - ATV61-71 ACCESSORIES
Discount Schedule	CP4C
GTIN	00785901807131
Nbr. of units in pkg.	1
Package weight(Lbs)	0.88
Returnability	Y
Country of origin	ID

Contractual warranty

Warranty period	18 months
-----------------	-----------