



ALUMA-FORM®

FIBERGLASS GUY STRAIN INSULATORS

16,000 Pound Rating: Clevis w/ Roller & Clevis w/ Roller



Material Specifications

End Fitting


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

Fiberglass Rod

- Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

Minimum Ultimate Strength Rating

- 16,000 pounds

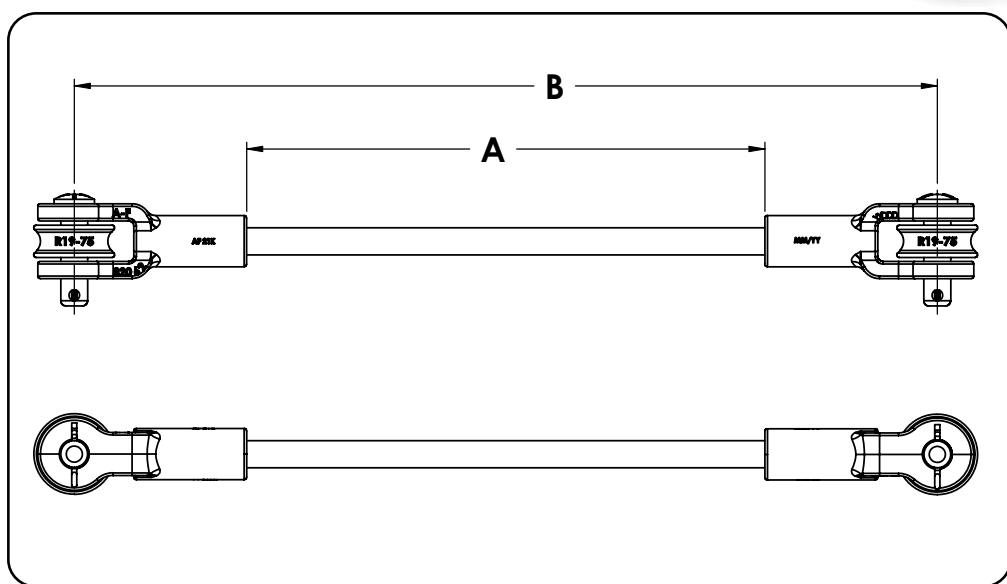

Catalog Name	Strength, lbs.	Length "A", inches ¹	Length "B", inches	1st End Fitting	2nd End Fitting	Weight, lbs
FGS16-12RR	16,000	12	20	Clevis w/ Roller	Clevis w/ Roller	4.1
FGS16-18RR	16,000	18	26	Clevis w/ Roller	Clevis w/ Roller	4.2
FGS16-24RR	16,000	24	32	Clevis w/ Roller	Clevis w/ Roller	4.3
FGS16-36RR	16,000	36	44	Clevis w/ Roller	Clevis w/ Roller	4.6
FGS16-42RR	16,000	42	50	Clevis w/ Roller	Clevis w/ Roller	4.7
FGS16-54RR	16,000	54	62	Clevis w/ Roller	Clevis w/ Roller	5.0
FGS16-60RR	16,000	60	68	Clevis w/ Roller	Clevis w/ Roller	5.1
FGS16-78RR	16,000	78	86	Clevis w/ Roller	Clevis w/ Roller	5.5
FGS16-96RR	16,000	96	104	Clevis w/ Roller	Clevis w/ Roller	5.9
FGS16-120RR	16,000	120	128	Clevis w/ Roller	Clevis w/ Roller	6.5
FGS16-144RR	16,000	144	152	Clevis w/ Roller	Clevis w/ Roller	7.0

Notes:

1. Custom lengths available, contact factory or local sales representatives