

### Material

Body and Keeper –

ALS, AC, RALS -- Aluminum Alloy A356-T6


FAC, FAC90 – Ductile Iron, Hot Dip Galvanized

Hardware – Steel, Hot Dip Galvanized

Cotter Pin – Stainless Steel

### Features

Recommended Torque on U-bolts = 40-45 lbs

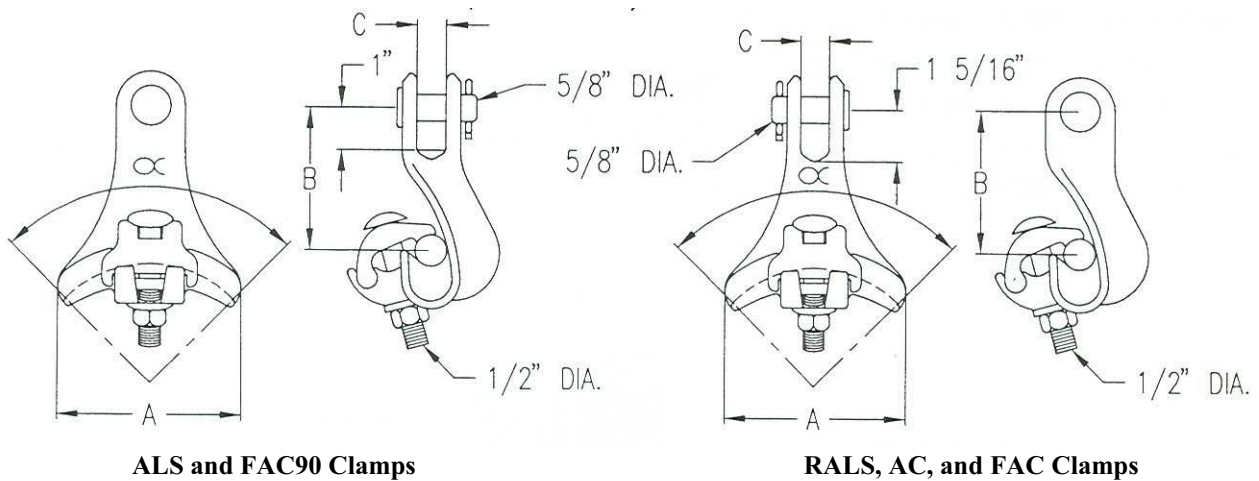

Catalog Number	Inches	Cable Range		Dimensions			Angle Degrees	Ultimate Strength	Weight Lbs/100
		ACSR	Alum.	A	B	C			
ALS-1-N	.23 - .75	4 - 397.5	4 - 397.5	4 1/8	3 3/8	11/16	90	10,000	148
RALS-1-N					2 7/8				
AC-86	.316 - .856	2 - 477	1 - 556.5	4 5/8	3 1/8	3/4	120	12,000	--
AL-2-N	.50 - 1.04	3/0 - 795	4/0 - 795	4 5/8	3 5/8	11/16	90	10,000	163
RALS-2-N	.50 - 1.092	3/0 - 795	4/0 - 874.5	4 5/8	3	11/16	90	10,000	152
AC-125	.50 - 1.25	3/0 - 1033.5	4/0 - 1113	3 3/4	4 5/8	3/4	80	12,000	--
ALS-3-N	1.02 - 1.66	715.5 - 1780	795 - 2000	7 3/4	4 1/8	11/16	80	18,000	324
RALS-3-N	1.02 - 1.66	715.5 - 1780	795 - 2000	7 3/4	4 1/2	11/16	80	18,000	340

Notes:

- 1) For piercing pin, add suffix "-S200"
- 2) Add suffix "-S" for socket fitting

Catalog Number	Cable Range Inches	Dimensions			Maximum Line Angle	Ultimate Strength
		A	B	C		
FAC-75	.16 - .75	3	4 1/4	3/4	120	11,000
FAC90-75	.23 - .75	4 1/4	2 3/8	3/4	120	11,000