


SUBSTATION CONNECTORS



BUS SUPPORTS ALUMINUM TUBE TO INSULATOR



ALUMINUM
AUR



Aluminum alloy bus support for aluminum tubing. Caps may be rotated to provide slip-free or rigid clamping. Stainless steel static eliminator springs are standard. Clamping bolts have hex-stops for one-wrench installation.

Cap screws are supplied for upright mounting.

Material: Castings—356-T6 aluminum alloy
Clamping hardware—aluminum alloy
Mounting hardware—galvanized steel

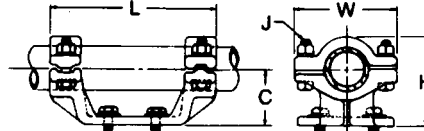

CATALOG NUMBER	CONDUCTOR SIZE IPS/EHIPS	BOLT CIRCLE DIA.	DIMENSIONS INCHES (MM)						APPROX. WT. EACH LBS. (KG)
			L	H	C	W	J	K	
AUR-06-3	3/4	3	7-3/8 (187.32)	2-7/8 (73.02)	2 (50.8)	3-3/8 (85.72)	1/2 (12.7)	9/16 x 3/4	2.2 (1.0)
AUR-06-5	3/4	5	9-3/8 (238.12)	3-1/8 (79.38)	2-1/4 (57.15)	3-3/8 (85.72)	1/2 (12.7)	11/16 x 7/8	3.1 (1.4)
AUR-10-3	1	3	7-3/8 (187.32)	3 (76.2)	2 (50.8)	3-5/8 (92.08)	1/2 (12.7)	9/16 x 3/4	2.4 (1.1)
AUR-10-5	1	5	9-3/8 (238.12)	3-1/4 (82.55)	2-1/4 (57.15)	3-5/8 (92.08)	1/2 (12.7)	11/16 x 7/8	3.2 (1.4)
AUR-12-3	1-1/4	3	7-3/8 (187.32)	3-1/2 (88.9)	2-1/4 (57.15)	4 (101.6)	1/2 (12.7)	9/16 x 3/4	2.6 (1.2)
AUR-12-5	1-1/4	5	9-3/8 (238.12)	3-5/8 (92.08)	2-3/8 (60.32)	4 (101.6)	1/2 (12.7)	11/16 x 7/8	3.2 (1.5)
AUR-14-3	1-1/2	3	7-3/8 (187.32)	3-7/8 (98.42)	2-1/2 (63.5)	4-1/8 (104.78)	1/2 (12.7)	9/16 x 3/4	3.3 (1.5)
AUR-14-5	1-1/2	5	9-3/8 (238.12)	4 (101.6)	2-1/2 (63.5)	4-1/8 (104.78)	1/2 (12.7)	11/16 x 7/8	3.4 (1.5)
AUR-20-3	2	3	7-1/2 (190.5)	4-3/8 (111.12)	2-3/4 (69.85)	4-3/4 (120.65)	1/2 (12.7)	9/16 x 3/4	3.2 (1.4)
AUR-20-5	2	5	9-1/2 (241.3)	4-3/8 (111.12)	2-3/4 (69.85)	4-3/4 (120.65)	1/2 (12.7)	11/16 x 7/8	4.4 (2.0)
AUR-24-3	2-1/2	3	8-1/4 (209.55)	5 (127.0)	3-1/8 (79.38)	5-5/8 (142.88)	1/2 (12.7)	9/16 x 3/4	3.9 (1.8)
AUR-24-5	2-1/2	5	10-1/4 (260.35)	5-1/8 (130.18)	3-1/8 (79.38)	5-5/8 (142.88)	5/8 (15.88)	11/16 x 7/8	5.6 (2.5)
AUR-30-3	3	3	8-3/8 (212.72)	5-7/8 (149.22)	3-5/8 (92.08)	6-1/4 (158.75)	5/8 (15.88)	9/16 x 3/4	5.2 (2.4)
AUR-30-5	3	5	10 (254.0)	6 (152.4)	3-5/8 (92.08)	6-1/4 (158.75)	5/8 (15.88)	11/16 x 7/8	5.9 (2.7)
AUR-34-3	3-1/2	3	8-3/8 (212.72)	6-1/2 (165.1)	4 (101.6)	6-7/8 (174.62)	5/8 (15.88)	9/16 x 3/4	5.8 (2.6)
AUR-34-5	3-1/2	5	10-3/8 (263.52)	6-7/8 (174.62)	4 (101.6)	6-7/8 (174.62)	5/8 (15.88)	11/18 x 7/8	6.2 (2.8)
AUR-40-3	4	3	8-1/4 (209.55)	7-1/4 (184.15)	4-1/2 (114.3)	7-3/8 (187.32)	5/8 (15.88)	9/16 x 3/4	6.4 (2.9)
AUR-40-5	4	5	10-1/4 (260.35)	7-1/4 (184.15)	4-1/2 (114.3)	7-3/8 (187.32)	5/8 (15.88)	11/16 x 7/8	7.4 (3.3)
AUR-50-3	5	3	10 (254.0)	8-1/4 (209.55)	4-7/8 (123.82)	8-1/4 (209.55)	5/8 (15.88)	9/16 x 3/4	8.1 (3.7)
AUR-50-5	5	5	10-5/8 (269.88)	8-1/4 (209.55)	4-7/8 (123.82)	8-1/4 (209.55)	5/8 (15.88)	11/16 x 7/8	9.5 (4.3)
AUR-60-3	6	3	9-3/8 (238.12)	9-1/4 (234.95)	5-3/8 (136.52)	9-3/8 (238.12)	5/8 (15.88)	9/16 x 3/4	9.8 (4.4)
AUR-60-5	6	5	11-1/2 (292.1)	9-1/4 (234.95)	5-3/8 (136.52)	9-3/8 (238.12)	5/8 (15.88)	11/16 x 7/8	10.9 (4.9)