


## CF695 - 30,000 lb Strain Insulators


Stock No.	L Inches	CC Inches	Wt. Lbs. Each
CF695-12	12	23-1/8	7.20
CF695-18	18	29-1/8	7.50
CF695-24	24	35-1/8	7.80
CF695-30	30	41-1/8	8.10
CF695-36	36	47-1/8	8.40
CF695-42	42	53-1/8	8.70
CF695-54	54	65-1/8	9.00
CF695-78	78	89-1/8	9.60
CF695-96	96	107-1/8	10.20
CF695-108	108	119-1/8	10.80
CF695-120	120	131-1/8	12.00
CF695-144	144	155-1/8	12.00
CF695-168	168	179-1/8	12.60

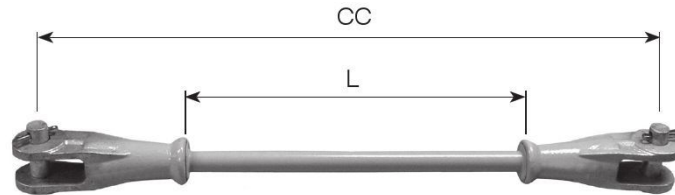

The **CF695** series uses 13/16" dia. fiberglass rod.

NOTE: For specific fitting dimensions, see "End Fitting Details" on pages F-2 & F-3.

### CF695 & CF696 End Fitting Options




Suffix	Figs.	Fittings	Example	Example
R	1 & 2	Clevis / Clevis with 1 Roller	CF695-36R	CF696-36R
R2	2 & 2	Clevis / Clevis with 2 Rollers	CF695-36R2	CF696-36R2

NOTE: CF695 uses Roller #28084  
CF696 uses Roller #28086

## CF696 - 35,000 lb Strain Insulators

Stock No.	L Inches	CC Inches	Wt. Lbs. Each
CF696-18	18	30-3/4	8.93
CF696-24	24	36-3/4	9.33
CF696-30	30	42-3/4	9.73
CF696-36	36	48-3/4	10.13
CF696-42	42	54-3/4	10.53
CF696-54	54	66-3/4	10.93
CF696-60	60	72-3/4	11.73
CF696-78	78	90-3/4	12.93
CF696-90	90	102-3/4	14.53
CF696-96	96	108-3/4	16.13

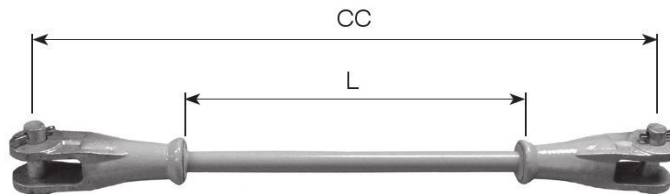

The **CF696** series uses 13/16" dia. fiberglass rod.