



SUBSTATION CONNECTORS



BUS SUPPORTS ALUMINUM CABLE OR TUBE TO INSULATOR


ALUMINUM
ASR



Aluminum alloy bus support for aluminum cable or tubing.


Cap screws are supplied for upright mounting.

Material: Castings—356-T6 aluminum alloy
Clamping hardware—aluminum alloy
Mounting hardware—galvanized steel

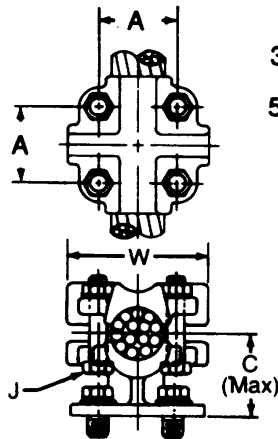

3" BC = 5/16" x 3/4"

5" BC = 1/4" x 7/8"



CATALOG NUMBER	CONDUCTOR RANGE				BOLT CIRCLE DIA.	DIMENSIONS INCHES (MM)				APPROX. WT. EACH LBS. (KG)
	CABLE			TUBING IPS		A	C	W	J	
	AAC	ACSR	DIA.							
ASR-200-3	4/0-2000 MCM	134.6-1780 MCM	.522-1.632 (13.26-41.45)	1/4-1	3	2-1/2 (63.5)	3-1/8 (79.4)	4-1/2 (114.3)	1/2 (12.7)	4.2 (1.9)
ASR-200-5	4/0-2000 MCM	134.6-1780 MCM	.522-1.632 (13.26-41.45)	1/4-1	5	2-1/2 (63.5)	3-1/8 (79.4)	4-1/2 (114.3)	1/2 (12.7)	4.8 (2.18)
ASR-300-3	600-3000 MCM	556.5-2156 MCM	.891-1.998 (22.63-50.75)	1/2-1-1/2	3	2-3/4 (69.9)	3-1/4 (82.6)	4-3/4 (120.7)	1/2 (12.7)	4.9 (2.2)
ASR-300-5	600-3000 MCM	556.5-2156 MCM	.891-1.998 (22.63-50.75)	1/2-1-1/2	5	2-3/4 (69.9)	3-1/4 (82.6)	4-3/4 (120.7)	1/2 (12.7)	5.5 (2.5)

SD-2