

TYPE UPED


Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Rated for 600 volts
- Range taking
- Insulating cover available
- Clear plated
- Cover has dielectric strength of 240 volts per mil
- Meets or exceeds ANSI C119.4 Class A specifications

Benefits

- Suitable for use with either copper or aluminum conductors
- Ensures reliability
- Reduces inventory
- Eliminates taping
- Provides low contact resistance
- No taping required, reliable insulation
- Industry standard

B

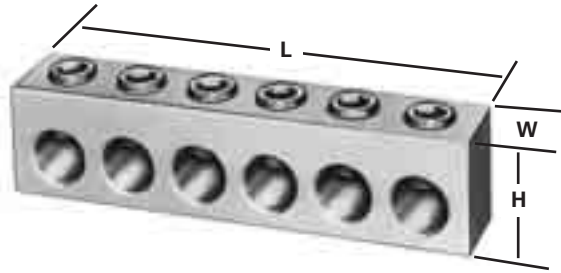

Catalog Number	Number of Ports	Wire Range	Connector Dimensions			Cover Catalog Number
			L	H	W	
PED2-350	2	350kcmil-10	2-1/16	1-1/4	1	CFF
PED3-350	3	350kcmil-10	2-15/16	1-1/4	1	CEE
PED4-350	4	350kcmil-10	3-7/8	1-1/4	1	CEE
PED5-350	5	350kcmil-10	4-3/4	1-1/4	1	CAA
PED6-350	6	350kcmil-10	5-11/16	1-1/4	1	CCC
PED8-350	8	350kcmil-10	7-1/2	1-1/4	1	CNN
PED2-500	2	500kcmil-10	2-3/8	1-5/8	1	CFF
PED3-500	3	500kcmil-10	3-15/16	1-5/8	1	CEE
PED4-500	4	500kcmil-10	4-13/16	1-5/8	1	CJJ
PED5-500	5	500kcmil-10	6	1-5/8	1	CJJ
PED6-500	6	500kcmil-10	7-1/4	1-5/8	1	CLL
PED8-500	8	500kcmil-10	9-11/16	1-5/8	1	SNN

See page 226 for cover information.

UPED OPTIONS:

- D - Disc Pad Screws
- 2M - Dual Mounting Hole
- A - Anodized Screw
- T - Tin Plated
- K - Kit
- P - Inhibitor

Example:

PED8-500DTP

