

# SUBSTATION CONNECTORS



## TERMINALS BRONZE STRAIGHT BOLT TERMINAL CABLE TO FLAT


BRONZE
SWL



Bronze alloy terminal, with 3/8" dia. hex head clamping bolts, for connecting copper cable to copper flat. Side formed pads are standard for flush mounting. Clamping bolts have hex-stops for one-wrench installation. Tongue holes have NEMA spacing. All sizes furnished with reversible cable caps.

Material: Castings—bronze alloy  
Clamping hardware—silicon bronze or stainless steel

45° & 90° angle connectors may be obtained by specifying desired angle.  
Example: SWL-050-C-Y90

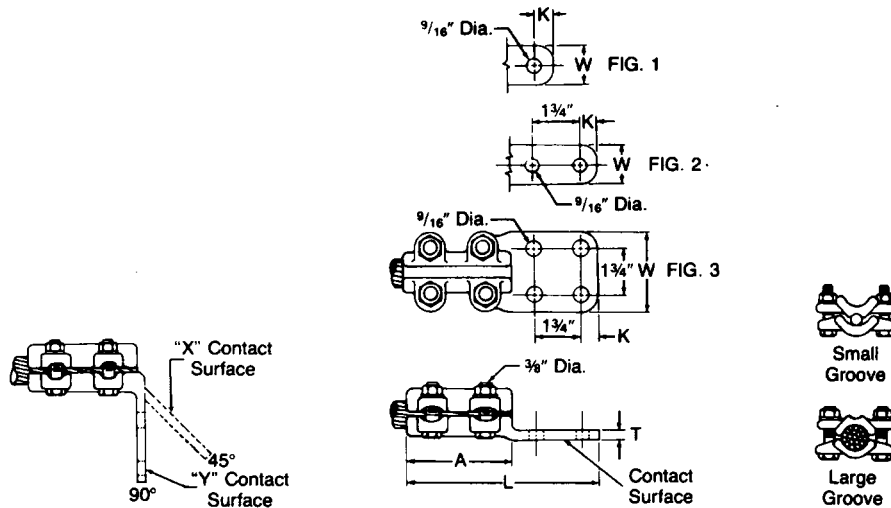

CATALOG NUMBER	FIG. NO.	COPPER CONDUCTOR RANGE			DIMENSIONS INCHES (MM)					APPROX. WT. EACH LBS. (KG)
		SMALL GROOVE	LARGE GROOVE	DIA. INCHES (MM)	L	A	K	T	W	
SWL-022-B	2	#6 Sol.-#2 Str.	#2 Sol.-2/0 Str.	.162-.419 (4.11-10.64)	5 3/4 (146.04)	2 1/2 (63.5)	5/8 (15.88)	1/4 (6.35)	1-1/2 (38.1)	1.5 (.7)
SWL-022-C	3				5-7/8 (149.22)	2 1/2 (63.5)	5/8 (15.88)	1/4 (6.35)	3 (76.2)	1.8 (.8)
SWL-025-B	2	#4 Sol.-1/0 Str.	2/0 Sol.-250 MCM	.204-.575 (5.18-14.60)	6 1/8 (155.58)	2 3/4 (69.85)	5/8 (15.88)	1/4 (6.35)	3 (76.2)	1.4 (.7)
SWL-025-C	3				6 1/8 (158.75)	2 3/4 (69.85)	5/8 (15.88)	1/4 (6.35)	3 (76.2)	2.0 (.9)
SWL-050-B2	2	1/0 Sol.-4/0 Str.	250-500 MCM	.325-.813 (8.25-20.65)	6 1/4 (158.75)	2 3/4 (69.85)	5/8 (15.88)	3/8 (9.52)	2 (50.8)	2.1 (1.0)
SWL-050-C	3				6 1/4 (158.75)	2 3/4 (69.85)	5/8 (15.88)	5/16 (7.94)	3 (76.2)	2.4 (1.1)