


S030047S2010

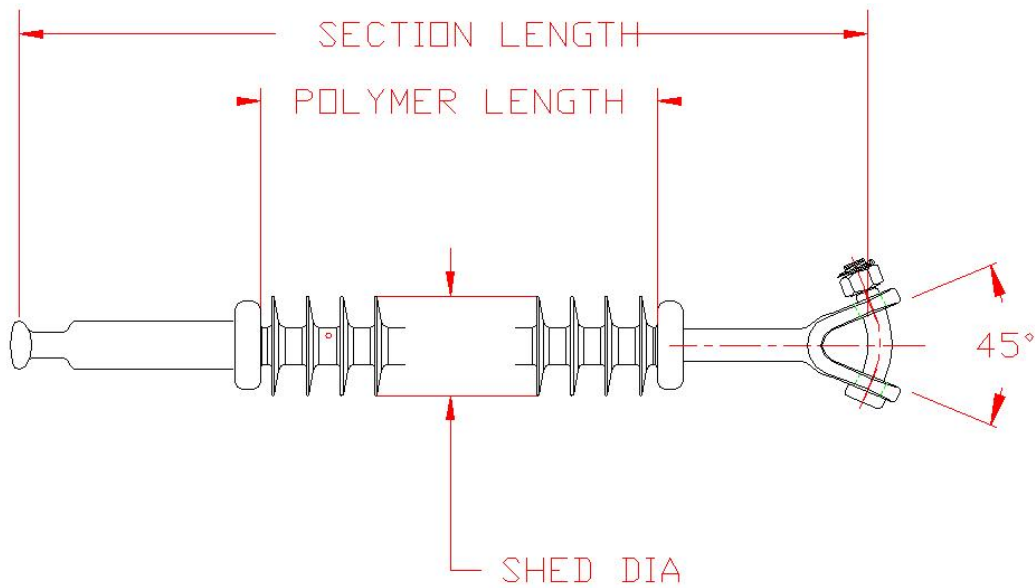


Product Specifications

Typical System Voltage	138kV / 161kV
Strength Class	30 kip, 5/8" (16 mm)
Top/Ground End Fitting	Y-Clevis
Bottom/Line End Fitting	ANSI Ball
Section Length	59.22 IN (1504 MM)
Leakage Distance	121 IN (3073 MM)
Corona Ring	None
Polymer Length	47.42 IN (1204 MM)
System Voltage (kV)	161kV
Working Load	15,000 lbs
Dry Arc Distance	47.4 IN (1205 MM)
Number of Sheds	44
Shed Style	Uniform
Shed Diameter	2.9 IN
Rod Diameter	5/8 IN (16 MM)
Thickness of housing over Rod	> 3MM
End Fitting Class	ANSI
End Fitting Material	Ductile Iron
SML	30,000 lbs
RTL	15,000 lbs
ANSI 60Hz Dry FO	500 kV
Housing Material	SILICONE RUBBER
ANSI 60Hz Wet FO	475 kV
ANSI 60Hz Wet Withstand	295 kV
IEC lightning Impulse Withstand - Positive	800 kV
ANSI Critical Impulse FO - Positive	690 kV
IEC lightning Impulse Withstand - Negative	795 kV
ANSI Critical Impulse FO - Negative	685 kV

Compressed Product Number

S030047S2010

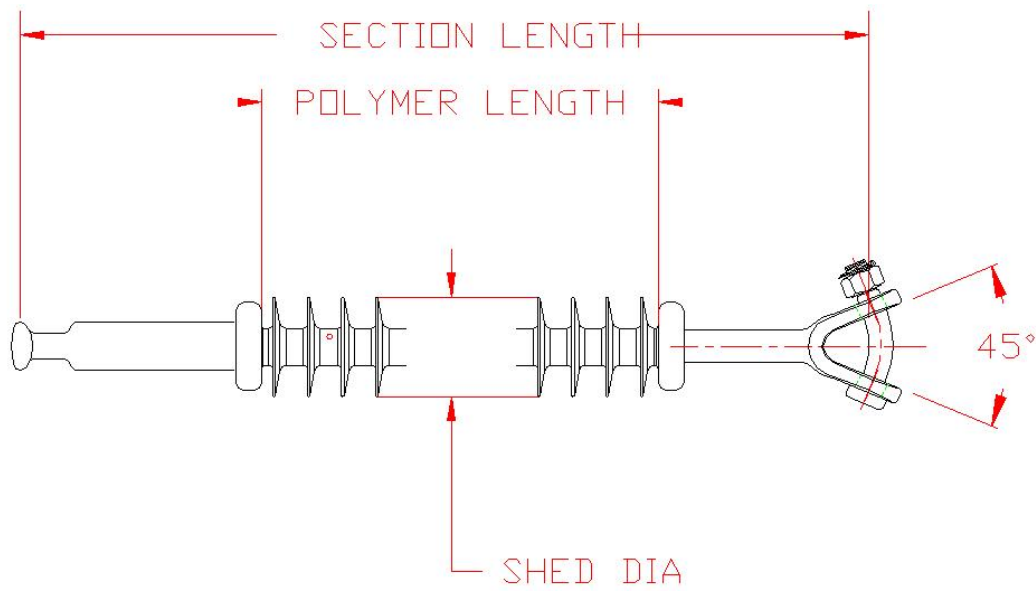

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.