




[Catalog Home](#)

**Product Datasheet**

**CHANCE**

**M100TA -- Type T (ANSI) Cutout Fuselink**

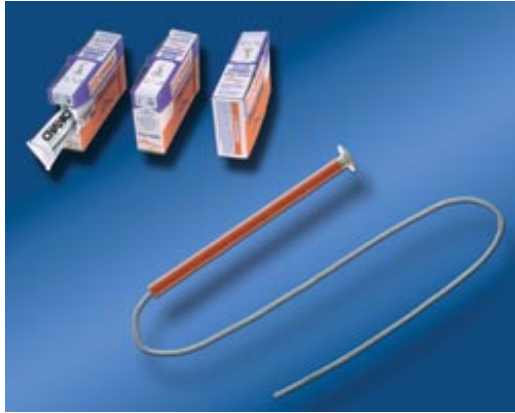

100 amp, Type T (ANSI) Cutout fuselink with a 26" (660.4mm) pigtail and a removable buttonhead.

**Product Specifications**

<b>Type</b>	Fuselinks
<b>Fuselinks</b>	Type T (ANSI)
<b>Amp Rating</b>	100
<b>Removable Buttonhead</b>	Yes
<b>Pigtail Length</b>	26" (660.4mm)
<b>PDF Catalog Page</b>	Click <a href="#">HERE</a> to view detailed PDF Catalog
<b>Fuse Link Application Guide and Time-Current Curves</b>	Click <a href="#">HERE</a> and request, Fuse Links (Bulletin 10-7701).
<b>Fuse Element</b>	Stainless-steel strain wire and a pure-tin fuse wire
<b>Required Cutout Fuseholder</b>	100 Amp (Do not use in a 200 amp fuseholder.)
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635904305
<b>Standard Package</b>	10
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	10
<b>Pallet Quantity</b>	4800
<b>Weight / Ea.</b>	0.265 lbs

**Compressed Product Number**

M100TA

[Catalog Home](#)



POWER SYSTEMS, INC.

[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.